


BONDERITE® E-CO DMC



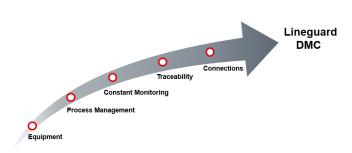

These days creating added value involves more than just an excellent product profile. You also need a partner who understands your business and your products, and who can develop new production techniques, optimise processes and design customised solutions.

A partner who is able to contribute in a real way to creating durable value: Henkel is the world leader in the adhesives, sealants and surface treatment markets. Drawing upon our unique and complete product portfolio, you benefit from our experience and the guarantee of the highest level of process reliability. **Bonderite E-CO** devices satisfy specific industry and maintenance requirements.

Bonderite E-CO DMC is a data management system device that can be used to measure an unlimited number of different, independent variables, including:

- Display data from Lineguard 97, BONDERITE E-CO ST4 & analog transmitters
- 2. Data Management
- 3. Dosing Pump Management
- 4. Levels Management
- 5. Alarm Management
- 6. Multilingual Interface
- 7. Accessible via Internet (LAN, WAN, SIM)
- 8. Automatic e-mail in case of alarms
- 9. Manual Values from Customer
- 10. Tailored Access Customer & Henkel
- 11. Data Base completely FREE (Internal)
- 12. Full Service Supplier (H. & S.)
- 13. Accessible via Smartphone & Tablet
- 14. Completely Integrable with existing devices and Signals of the Customer.

It's also possible, in a special window, to put an analysis manual data and correlate it to an output to make automatically dosages.

TECHNICAL CHARACTERISTICS

Size: 400 mm / 600 mm / 250 mm

Weight: 12,5 Kg

Point I/O: n°1 for Input signal

n°1 for output signal

Data tracking Internal Data Storage System

Numerical Report Graphic Report Consumption Report

Alert Mail

Connections Local

LAN

WAN / INTERNET SIM Card Smartphone Tablet

BOX

AISI 304 steel housing to meet IP65 standard.

OPERATING ENVIRONMENT

0°C ÷40°C (32°F ÷ 104°F)

0÷95% (no condensation) relative humidity

